


Gru a montaggio rapido Self-erecting Crane • Grue à montage rapide Schnellmontagekran• Grúa de montaje rapido



THE **ULTIMATE** CRANE™

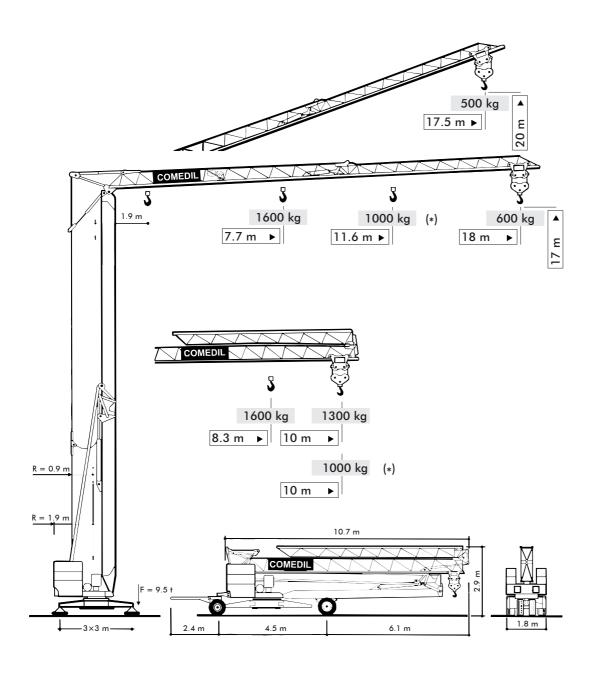


CBR 18H -1 MONO-1 **MONO-TRIFASE**

- montaggio oleodinamico integrale zincatura a caldo torre e braccio
- full hydraulic erection
- vollhydraulische Montage
- montage hydraulique intègral
- montaje hudraulico integral
- galvanized tower and jib
- Ausleger und Turm feuerverzinkt
- flèche et mât galvanisès
- trasportabile con tutta la zavorra
- trailerable with ballast
- verfahrbar mit Ballast
- transportable avec lest


forre y	pluma	cincadas	en	caliente	e •	transportab	le con	lastre


		CBR 18H-1			CBR 18H-1.6			
		m/min	kg	kW	m/min	kg	kW	
Sollevamento Hoisting Heben	* •	11	1000	1.7	7	1600	2.2	
Levage Elevaciòn		22	600	1.7	28	1000	5.2	
Distribuzione • Trolleying Katzfahren • Distribution • Distribuciòn	◄■ ►	23		1.5	23		1.1	
Rotazione • Slewing • Schwenken Orientation • Orientación		0.2 - 0.9 tr/min - U/min - rpm		1.1 da Nm	0.2 - 0.9 tr/min - U/min - rpm		1.1	
Montaggio ● Erection ● Montage ● Montage	1.8 kW			1.5 kW				
Potenza elettrica necessaria • Power Requir • Anschlusswert Puissance électrique nécess • Potencia electrica necesaria	3 kVA		6 kVA	10 kVA				
Rete elettrica • Mains Supply • Netzstrom • • Alimentacion	230 V - 50 Hz 400		0 V - 50 Hz	V - 50 Hz 400 V - 50				
Zavorra • Ballast • Ballast • Lest • Lastre	6510 kg							
Peso gru • Crane weight • Konstruktionsgev Poids de la grue • Peso della grua	5000 kg							





98/37 CE - 87/405 CEE - 89/336 CEE DIN 15018 H1-B3 DIN 15019/15020/4114





Gru Comedil s.r.l.

A Terex Company

Via S. Egidio 42/A, 33074 Fontanafredda (PN) - Italy Tel. (+39) 0434 567 311 - Telefax (+39) 0434 998631

Internet e-mail: info@comedil.com Internet home page: http://www.comedil.com

Divisione Automontanti

Via Alessandrina, 25 - 20095 Cusano Milanino (MI) - Italy Tel. (+39) 02 613 16011 - Telefax (+39) 02 613 16034 Internet e-mail: info.CBR@comedil.com

